


DIMENSIONI *DIMENSION*

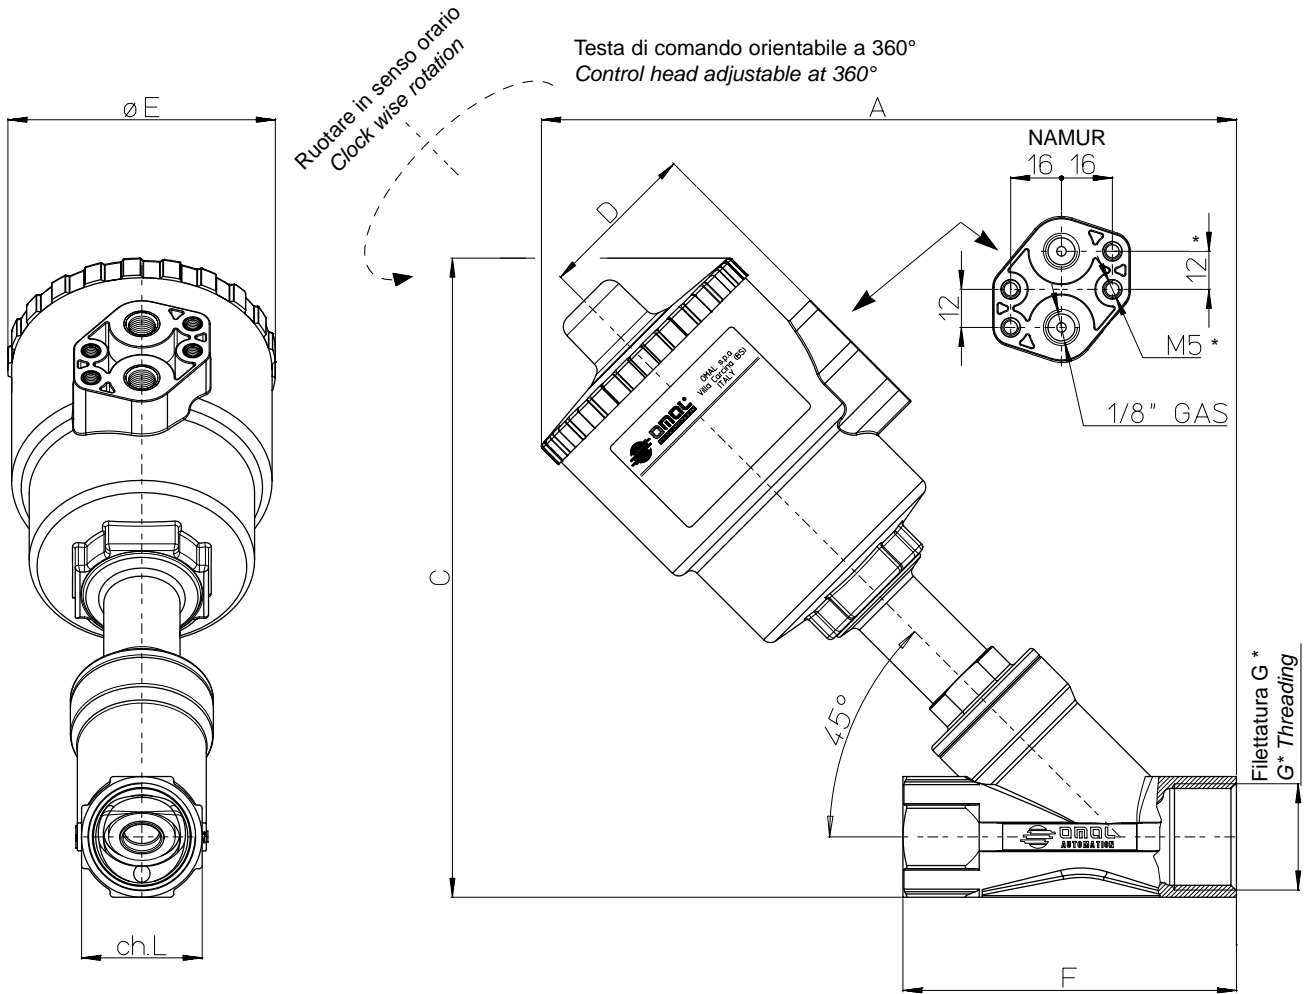

DN	G* G*	Attuatore Actuator	Versioni in AISI 316 (ARES - ATENA) Versioni in AISI 316 (ARES - ATENA)						Versione in Bronzo (ZEUS) Versione in Bronzo (ZEUS)					
			A	C	D	$\varnothing E$	F	ch. L	A	C	D	$\varnothing E$	F	ch. L
15	3/8"	DN 40**	146	133,5	35	61	65	25	144	134	35	61	65	27
15	3/8"	DN 50	190	169	44	70	85	25	163	153	44	70	65	27
15	1/2"	DN 40**	146	133,5	35	61	65	25	144	134	35	61	65	27
15	1/2"	DN 50	190	169	44	70	85	25	163	153	44	70	65	27
20	3/4"	DN 40**	153	141,5	35	61	75	31	---	---	---	---	---	---
20	3/4"	DN 50	195	176	44	70	95	31	173	163	44	70	75	27,5
20	3/4"	DN 63	213	194,4	50,5	84,4	95	31	191	181	50,5	84,4	75	27,5
25	1"	DN 50	200	183	44	70	105	38	---	---	---	---	---	---
25	1"	DN 63	219	202	50,5	84,4	105	38	206	196	50,5	84,4	90	41
25	1"	DN 90	259	242	66,2	116,4	105	38	246	236	66,2	116,4	90	41
32	1 1/4"	DN 50	208	191	44	70	120	47	---	---	---	---	---	---
32	1 1/4"	DN 63	226	209	50,5	84,4	120	47	215	205	50,5	84,4	110	50
32	1 1/4"	DN 90	266	249	66,2	116,4	120	47	255	245	66,2	116,4	110	50
32	1 1/4"	DN 110	302	285	77,4	140,6	120	47	---	---	---	---	---	---
40	1 1/2"	DN 63	231	218	50,5	84,4	130	54	---	---	---	---	---	---
40	1 1/2"	DN 90	271	258	66,2	116,4	130	54	270	264	66,2	116,4	120	58
40	1 1/2"	DN 110	307	294	77,4	140,6	130	54	306	300	77,4	140,6	120	58
50	2"	DN 63	245	233	50,5	84,4	150	66	---	---	---	---	---	---
50	2"	DN 90	285	274	66,2	116,4	150	66	280	275	66,2	116,4	150	70
50	2"	DN 110	321	310	77,4	140,6	150	66	316	311	77,4	140,6	150	70

* A richiesta la versione con filettatura NPT *On request NPT-threading*

** Cilindro di comando privo dell'interfaccia NAMUR *Control cylinder without NAMUR interface*