


Filter, Series AS5-FLS

- G 3/4 G 1
- filter porosity 5 µm
- suitable for ATEX

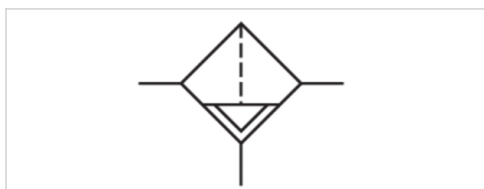

Version	Standard filter, Can be assembled into blocks
Parts	Filter
Mounting orientation	vertical
Certificates	suitable for ATEX
Working pressure min./max.	See table below
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 50 °C
Medium	Compressed air Neutral gases
Filter reservoir volume	87 cm ³
Filter element	exchangeable
filter porosity	5 µm
Condensate drain	See table below
Weight	See table below

Technical data

Part No.	Port	Flow Qn	Working pressure min./max.
R412009000	G 3/4	7800 l/min	1,5 ... 16 bar
R412009001	G 3/4	7800 l/min	1,5 ... 16 bar
R412009002	G 3/4	7800 l/min	0 ... 16 bar
R412009006	G 3/4	7800 l/min	1,5 ... 16 bar
R412009007	G 3/4	7800 l/min	1,5 ... 16 bar
R412009008	G 3/4	7800 l/min	0 ... 16 bar
R412009009	G 1	7800 l/min	1,5 ... 16 bar
R412009010	G 1	7800 l/min	1,5 ... 16 bar
R412009011	G 1	7800 l/min	0 ... 16 bar
R412009015	G 1	7800 l/min	1,5 ... 16 bar
R412009016	G 1	7800 l/min	1,5 ... 16 bar
R412009017	G 1	7800 l/min	0 ... 16 bar

Part No.	Condensate drain	Reservoir
R412009000	semi-automatic, open without pressure	Polycarbonate
R412009001	fully automatic, open without pressure	Polycarbonate
R412009002	fully automatic, closed without pressure	Polycarbonate
R412009006	semi-automatic, open without pressure	Die cast zinc with window
R412009007	fully automatic, open without pressure	Die cast zinc with window
R412009008	fully automatic, closed without pressure	Die cast zinc with window
R412009009	semi-automatic, open without pressure	Polycarbonate

Part No.	Condensate drain	Reservoir
R412009010	fully automatic, open without pressure	Polycarbonate
R412009011	fully automatic, closed without pressure	Polycarbonate
R412009015	semi-automatic, open without pressure	Die cast zinc with window
R412009016	fully automatic, open without pressure	Die cast zinc with window
R412009017	fully automatic, closed without pressure	Die cast zinc with window

Part No.	Protective guard	Material Reservoir	Weight
R412009000	Polyamide	reservoir, polycarbonate, with PA protective guard	0,718 kg
R412009001	Polyamide	reservoir, polycarbonate, with PA protective guard	0,769 kg
R412009002	Polyamide	reservoir, polycarbonate, with PA protective guard	0,769 kg
R412009006	-	-	1,21 kg
R412009007	-	-	1,26 kg
R412009008	-	-	1,26 kg
R412009009	Polyamide	reservoir, polycarbonate, with PA protective guard	0,718 kg
R412009010	Polyamide	reservoir, polycarbonate, with PA protective guard	0,769 kg
R412009011	Polyamide	reservoir, polycarbonate, with PA protective guard	0,769 kg
R412009015	-	-	1,21 kg
R412009016	-	-	1,26 kg
R412009017	-	-	1,26 kg

Nominal flow Q_n with secondary pressure $p_2 = 6$ bar at $\Delta p = 1$ bar

Suitable for use in Ex zones 1, 2, 21, 22

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Note: Polycarbonate reservoirs are susceptible to solvents, supplementary information can be found at "Customer information".

Suitable for use in Ex zones 1, 2, 21, 22

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.

Also suitable for separation of fluid oil or water due to the design.


Max. achievable compressed air class acc. to ISO 8573-1:2010 6 : 7 : -

Technical information

Material	
Housing	Polyamide
Front plate	Acrylonitrile butadiene styrene
Seals	Acrylonitrile butadiene rubber
Threaded bushing	Die cast zinc
Reservoir	Polycarbonate Die cast zinc
Protective guard	Polyamide
Filter insert	Polyethylene

Dimensions

Dimensions

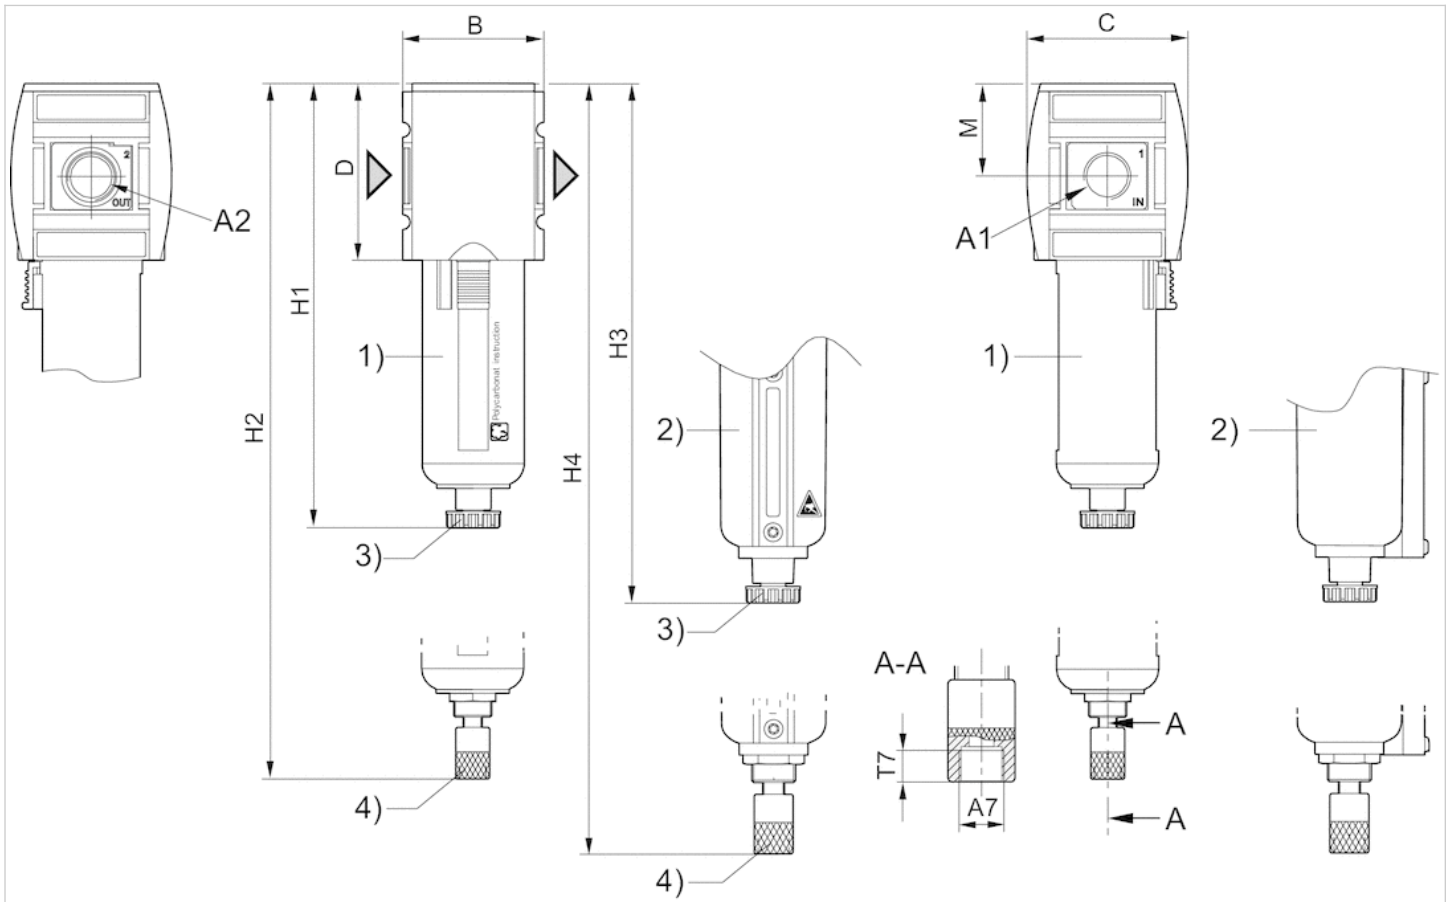

A1 = input

A2 = output

A7 = condensate drain

1) Plastic reservoir and protective guard with window

2) Metal reservoir with level indicator

3) Semi-automatic condensate drain


4) Fully automatic condensate drain

Dimensions in mm

A1	A2	A7	B	C	D	H1	H2	H3	H4	M	T7
G 3/4	G 3/4	G 1/8	85	103	109	250	266	254	270.5	58	8.5
G 1	G 1	G 1/8	85	103	109	250	266	254	270.5	58	8.5


Diagrams

Flow rate characteristic

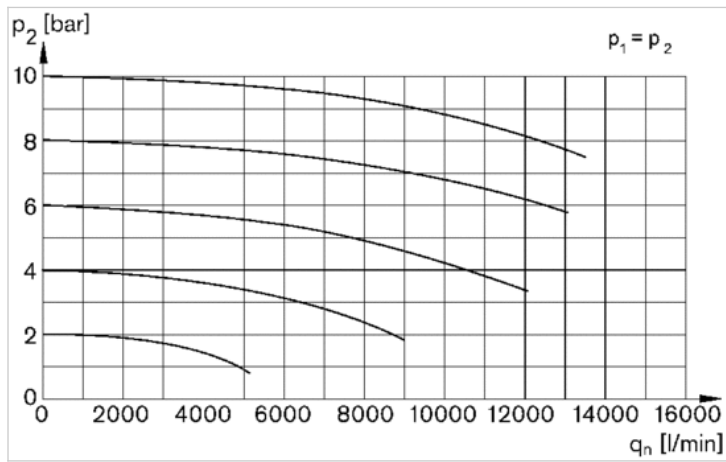

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

Accessories overview

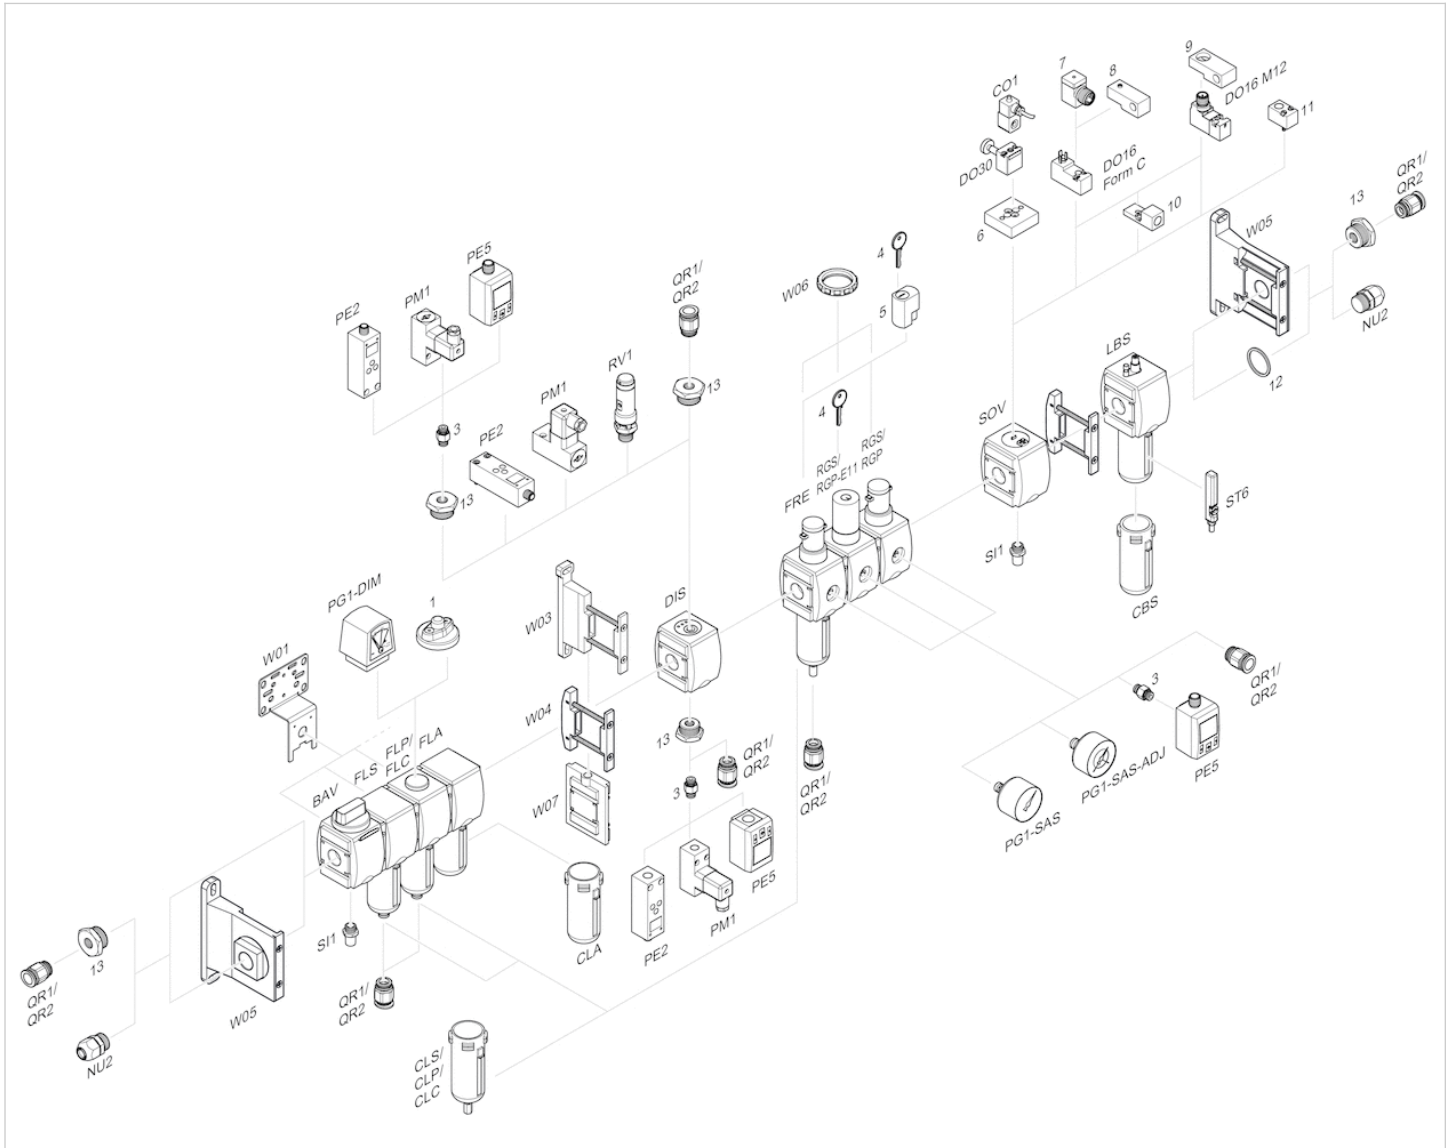

- 1 = contamination display
- 3 = Double nipple
- 4 = Key for E11 locking
- 5 = mortise lock
- 6 = Transition plate DO30
- 7 = Adapter, Series CON-VP
- 8 = Mounting aid DO16, form C
- 9 = Mounting aid DO16, M12
- 10 = Adapter for external pilot air
- 11 = Adapter pneumatic operation
- 12 = Sealing ring
- 13 = Reducing nipple